


PRAT

TEAFLEX®

www.teaflex.com

Pressacavi anti torsione in ottone nichelato
Strain relief cable glands nickel plated

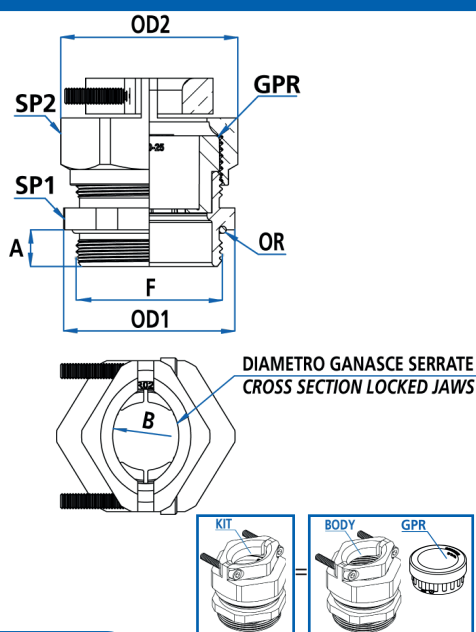

Applicazione Application



Le particolari ganasce di questi pressacavi oltre a garantire un' eccezionale tenuta a trazione del cavo evitano la possibilità di torsione del cavo stesso. Pressacavi in ottone nichelato con gommino di serraggio in TPE e anello "O" ring sulla filettatura. **Viti di serraggio acciaio inox AISI 304.**

Note: I gommini sono facilmente riconoscibili grazie al codice articolo stampato sul prodotto.
Colore: blu RAL 5005

The particular design of the jaws guarantees an excellent strain relief of the cable avoiding jerking movements. Strain relief brass cable glands nickel plated with TPE insert and "O" ring on thread. **Stainless steel AISI 304 locking screws.**

Remarks: Sealing inserts are easily recognizable thanks to the Part n. printed on the product.
Color: blue RAL 5005.

PRAT - Pressacavi industriali antitorsione in ottone nichelato

GAS CODICE KIT	GAS CODICE BODY	F Filetto GAS	A mm	OD1- OD2 mm	SP1- SP2 mm	PG CODICE KIT	PG CODICE BODY	F Filetto PG	A mm	OD1- OD2 mm	SP1- SP2 mm	ISO Metrico CODICE KIT	ISO Metrico CODICE BODY	F Filetto ISO Metr.	A mm	OD1 OD2 mm	SP1 SP2 mm	B mm	Ø cavo mm min. max.	Codice Gommino	Confez. Standard KIT
PRAT01211	CPRAT012	1/2"	9	26-27	24	PRAT1311	CPRAT013	13,5	6,5	24-27	22-24	PRATM2011	CPRATM20	M20x1,5	8	24-27	22-24	9,1	7 - 10,5	GPR01311	50
PRAT01213						PRAT1313						PRATM2013							9 - 13	GPR01313	
PRAT03413	CPRAT034	3/4"	10	30,5-29	28-26	PRAT1613	CPRAT016	16	6,5	26,5-29	24-26	PRATM2513	CPRATM25	M25x1,5	9	30-29	28-26	10,5	9 - 13	GPR01613	50
PRAT03416						PRAT1616						PRATM2516							11,5 - 15,5	GPR01616	
PRAT03418	CPRAT34A			32-33	30							PRATM2518	CPRATM25A			33-29	30-26	13,1	14 - 18	GPR02118	20
PRAT03420												PRATM2520							17 - 20,5	GPR02120	
PRAT10016	CPRAT100	1"	11	38,5-33	35-30	PRAT2116	CPRAT021	21	7,5	32-33	30	PRATM3216	CPRATM32	M32x1,5	10	37,5-33	35-30	13,1	11,5 - 15,5	GPR02116	20
PRAT10018						PRAT2118						PRATM3218							14 - 18	GPR02118	
PRAT10020	CPRAT100A			43-44,5	40	PRAT2120						PRATM3220	CPRATM32A			43-44,5	40	19,5	17 - 20,5	GPR02120	15
PRAT10025												PRATM3225							20 - 25	GPR02925	
						PRAT2920	CPRAT029	29	9,25	43-44,5	40	PRATM4020	CPRATM40A	M40x1,5	10	47-44,5	42-40	19,5	17 - 20,5	GPR02920	15
						PRAT2925						PRATM4025							20 - 25	GPR02925	
						PRAT2928						PRATM4028							24 - 28	GPR02928	
PRAT11430	CPRAT114	1" 1/4	9	48-50	45							PRATM4030	CPRATM40		10	48-50	45	21,5	26 - 30	GPR11430	10
PRAT11232	CPRAT112	1" 1/2	9	55-56	50	PRAT3632	CPRAT036	36	9	55-56	50	PRATM5032	CPRATM50	M50x1,5	10	57-56	52-50	24	27 - 32	GPR03632	10
PRAT11234						PRAT3634						PRATM5034							29 - 34	GPR03634	
PRAT11236						PRAT3636						PRATM5036							32 - 36	GPR03636	
PRAT20044	CPRAT200	2"	10	70	64	PRAT4844	CPRAT048	48	10	70	64	PRATM6344	CPRATM63	M63x1,5	10	70	64	39,5	39 - 44	GPR04844	5
GAS KIT NUMBER	GAS BODY NUMBER	F GAS thread	A mm	OD1- OD2 mm	SP1- SP2 mm	PG KIT NUMBER	PG BODY NUMBER	F PG thread	A mm	OD1- OD2 mm	SP1- SP2 mm	ISO METRIC KIT NUMBER	ISO METRIC BODY NUMBER	F ISO Metric thread	A mm	OD1- OD2 mm	SP1- SP2 mm	B mm	Cable Ø mm Min. Max.	Seal REF. Part N.	KIT Packing Unit

PRAT - Industrial strain relief cable glands made of brass nickel plated

Esempio d'ordine **KIT / KIT** Order example: **PRATM2516**

PRAT Pressacavi anti torsione in ottone nichelato
Strain relief cable gland brass nickel plated

M Filettatura ISO Metrica - ISO metric thread

25 Dimensione filetto - Thread dimension

16 Passaggio cavo 11,5-15,5 / Cable range 11,5-15,5

